

Hydraulic Wedgie and Spread Cylinders

▼ Shown clockwise from top: **WR-15, WR-5, A-92**



A, WR Series

Capacity:
0,75 - 1,0 ton

Tip Clearance:
12,8 - 35,0 mm

Maximum Spread Range:
94 - 292 mm

Maximum Operating Pressure:
700 bar

- **Single-acting, spring return**
- **WR-15:** For long stroke spreading applications
- **WR-5:** For use in very confined work areas
- **A-92:** Spreader attachment screws onto RC-Series 10 ton cylinders (except RC-101).



Nut Cutters

Remove rusted or corroded nuts easily with Enerpac Nut Splitters. Hexagon nut capacities up to 75 mm.


Page: 48




Best Match Hand Pump

To power your Wedgie and Spreader attachment the **P-392** Hand Pump is an ideal choice.


See the Enerpac **E326e** catalog for the full range of hand pump options.



WR-5

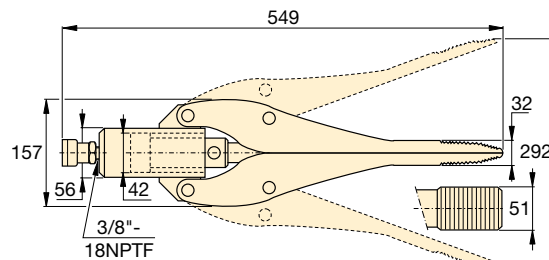

WR-15

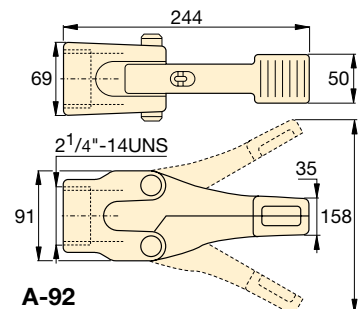

A-92

Spreader Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	Wt.
ton (kN)	(mm)		(mm)	(cm ²)	(cm ³)	(kg)
1,0 (8,9)	12,8	WR-5	94	6,5	10,0	2,3
0,75 (6)	32,0	WR-15	292	14,5	64,1	11,3
1,0 (8,9)	35,0	A-92	158	–	–	3,6

A WR-5 wedgie cylinder is used to position a concrete block on a construction site. ▶

